

The RADWIN logo is positioned at the top center of the page, consisting of the word "RADWIN" in white, uppercase letters on a solid orange rectangular background.

RADWIN JET point-to-multipoint for private networks Product Brochure

PtMP solution
with PtP
performance
750 Mbps

RADWIN JET

Beamforming solution for fiber-like connectivity

RADWIN JET is a disruptive Point-to-MultiPoint smart beamforming solution, excellent for operation in heavily congested unlicensed and licensed bands where spectrum resources are scarce. Offering up to 750 Mbps per sector, RADWIN JET ensures revenue growth for residential and enterprise service providers by delivering fiber-like connectivity with incomparable resiliency.

Watch Clip



JET highlights

Market-leading Base Station

- » Base Station with smart beamforming antenna
- » Up to 750 Mbps per sector, 3 Gbps per cell
- » Guaranteed SLA (CIR)
- » Low latency and Jitter
- » Long range – up to 40 km / 25 miles
- » Radio synchronization for greater network capacity with built-in GPS
- » Dynamic channel bandwidth selection - 80/40/20 MHz

Powerful subscriber units (SUs)

- » High-capacity SUs – up to 200 Mbps
- » Pay-as-you-grow capacity
- » Multiple antenna configurations in a single unit
- » Small form factor for low visual impact
- » Innovative operational simplicity for mass deployment

Multi-band radio

- » 3.3 - 3.8 / 3.65 GHz or 4.9 - 5.9 GHz in the same unit

Bi-Beam™ beamforming solution

RADWIN Bi-Beam highlights

- » Active beamforming antenna in both uplink and downlink directions
- » Antenna steering for best link performance over a 90° sector
- » Effective narrow beam of 8° @ 5.x GHz, 15° @ 3.x GHz
- » OFDM & MIMO 2x2 / diversity

RADWIN Bi-Beam benefits

- » High interference immunity similar to Point-to-Point
- » Industry's highest throughput and range
- » Optimized frequency reuse -2
- » Robust operation in nLOS / NLOS
- » Simplified network planning



Government & enterprise networks

RADWIN JET, powered by unique beamforming technology, offers wireless broadband infrastructure for government, public safety and enterprise networks required to work in semi-licensed or congested unlicensed spectrum in urban or suburban areas. RADWIN JET dramatically reduces the total cost of ownership and secures stable and reliable connectivity for the following applications:

- » Connectivity of high definition video surveillance
- » Long range building-to-building connectivity
- » Mission critical broadband applications
- » Real-time SCADA data transmission
- » Industrial infrastructure monitoring & control (Oil and Gas, Utilities)
- » Leased line replacement

Service providers

fixed IP traffic doubles in volume every 5 years, generating greater demand for more capacity on the subscriber side. RADWIN JET offers a future-proof solution that enables Service Providers to keep pace with the ever growing demand, and increase revenue through fiber-like wireless access in licensed and unlicensed sub-6GHz bands.

Wireless Internet Service Providers (ISPs)

- » Last mile connectivity

Fixed / Incumbent Service Providers

- » xDSL replacement
- » Sub-urban and rural FTTH alternative
- » FTTH backup
- » WiMAX access network replacement
- » DSLAMs backhaul

Cellular operators

- » Small Cell Backhaul - RADWIN JET NLOS solution is available to support complex urban NLOS backhaul scenarios



Bi-Beam™ technology


RADWIN JET incorporates unique Bi-Beam™ technology: A disruptive beamforming MIMO antenna at the Base Station, together with an intelligent air interface that redefines the performance of Broadband Wireless Access. RADWIN JET beamforming antenna is formed from an array of antenna elements that are combined to generate a narrow and steerable beam. The beamforming antenna is utilized both for uplink and downlink directions to deliver the following unique advantages:

» **Increase antenna and system gain in uplink & downlink directions**

Boost capacity, range and link robustness

» **Improve interference immunity, similar to PtP**

A result of the narrow beam replacing the wide beam of common sector antennas.

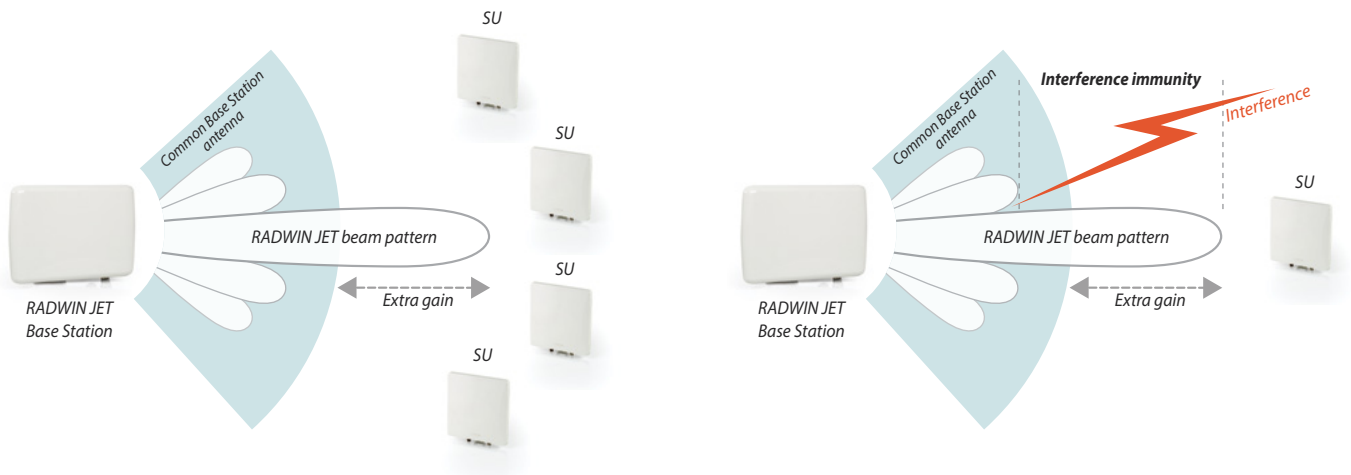


» **Greater frequency reuse**

The narrow beam created by the Bi-Beam antenna reduces the level of mutual interference between adjacent sectors and sites. Less spectrum is required and network planning is simplified.

» **Excellent operation in nLOS / NLOS conditions**

Bi-Beam antenna can be steered to the optimal reflection point to obtain the best possible link.

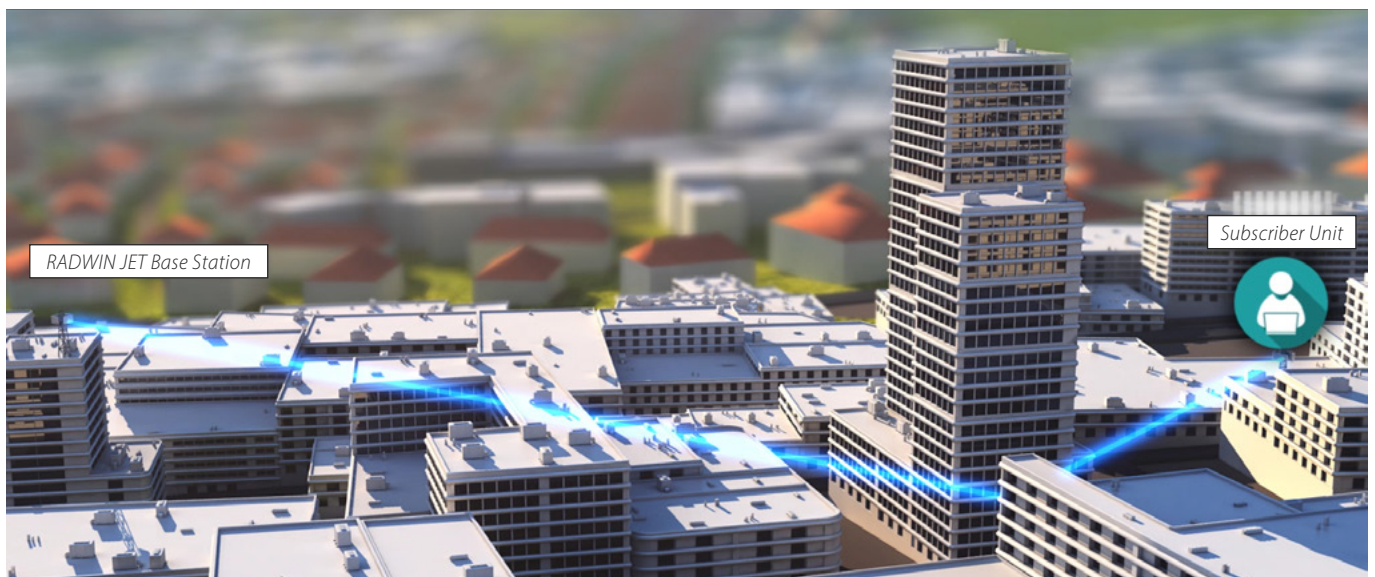

RADWIN JET base stations with bi-beam technology

jET PRO delivers up to 750Mbps in 5.x GHz and up to 250Mbps in 3.x GHz. Designed for a variety of applications, the Base Station enables SLA connectivity based on CIR (Committed Information Rate) for enterprise customers, video cameras and other heavy bandwidth applications. JET PRO also supports Best Effort connectivity for residential and non- critical bandwidth applications.



Laptop 13"



RADWIN JET:
Light, compact & IP 67 compliant

Powerful, carrier-grade subscriber units

RADWIN's powerful Subscriber Units (SUs) deliver fiber-like connectivity with the industry's highest Packet-Per-Second (PPS) processing power to maintain highest capacity even in small packet applications.

Designed for low visual impact, RADWIN's ruggedized SUs assure long lasting operation even in the harshest conditions. Innovative operational simplicity concepts and cutting-edge technology streamline operations and maintenance procedures.

High-capacity subscriber units (4.9 - 5.9 GHz)

- » Pay-as-you-grow 25 up to 200Mbps
- » Multiple antenna configurations in a single unit
- » High durability – IP 66 enclosure
- » Compatible with all RADWIN base stations
- » Available Models:
 - › SU AIR: Designed for residential subscribers
 - › SU PRO: Offers SLA for enterprise and bandwidth-demanding applications, based on CIR



SU PRO – Connectorized unit
with embedded antenna

High-capacity subscriber units (3.3 - 3.8 GHz / 3.65 GHz)

- » Pay-as-you-grow 25 up to 100Mbps
- » Available as connectorized unit or with integrated antenna
- » High durability – IP 67 enclosure
- » Available Models:
 - › HSU-R: Designed for residential subscribers
 - › HSU: Offers SLA for enterprise and bandwidth-demanding applications, based on CIR



Innovative operational simplicity

Smartphone installation application

RADWIN SU PRO series include a smartphone application tool which is designed to speed up and simplify the installation process.

WINTouch APP

Enables automated installation, alignment & commissioning

Simple, fast and precise installation



Android & iOS

Multiple antenna configurations

RADWIN SU series includes an embedded antenna and is compatible with RADWIN's new and innovative slide-on antenna to achieve greater range.

An option for third-party external antennas is also available.

TurboGain™ antenna

Slide-on antenna

Doubles the service range



Key product benefits

more Capacity, Less Infrastructure

RADWIN JET uniquely delivers fixed and high transmission power across all modulations. When combined with increased gain and an interference-immune Bi-Beam antenna, RADWIN JET delivers greater downlink and uplink capacity and a longer range than conventional PtMP solutions or PtMP with beamforming in an uplink-only direction.

Greater Network Capacity Per Given Spectrum

Only two frequency channels are required to deploy a multiple JET cell network - with each cell comprising of 4 sectors. As a result, two channels of 80 MHz can yield tremendous cell capacity of up to 3 Gbps!

Unique Air Interface for Highly Robust Link Performance

RADWIN JET BI-Beam technology ensures best link performance by managing the individual transmission scheme of each SU: Channel bandwidth (80, 40 or 20MHz)

and antenna configuration (MIMO or diversity mode) are dynamically selected per SU to achieve the highest possible capacity. Fast ARQ (Automatic Repeat upon reQuest) is used to guarantee error-free transmission, even in adverse spectrum conditions.

Full Span of Asymmetric Traffic

RADWIN JET can be configured to deliver more than 90% of traffic in either uplink or downlink direction.

Secured Service Level Agreement (SLA) for Bandwidth Demanding Applications

RADWIN's Dynamic Bandwidth Allocation (DBA) optimally maximizes throughput for active users demanding various service levels e.g. Committed Information Rate (CIR) or Best Effort.

TDD Synchronization, Enabling Dense Deployments with Maximum Performance

RADWIN JET features TDD synchronization between sectors and sites, using a built-in GPS. This synchronization prevents mutual interference and increases network capacity and range.



Product specifications (See individual Product Data Sheets for detailed spec.)

Maximum Net Aggregate Capacity

	Base station		High-Capacity Subscriber Units
	JET PRO	JET	
4.9 - 5.9 GHz	750 Mbps	-	SU AIR – Up 100Mbps, SU PRO – Up to 200Mbps
3.3 - 3.8 GHz, 3.65 GHz	-	250 Mbps	10, 25, 50 Mbps, upgradable to 100Mbps

Antenna Configurations

4.9 - 5.9 GHz	Beamforming antenna:		Connectorized unit with 16dBi embedded antenna, 22dBi when using TurboGain™
	20 dBi (5.1 - 5.9 GHz), 17 dBi (4.9 GHz)		
3.3 - 3.8 GHz, 3.65 GHz	Beamforming antenna 17dBi		13dBi, 20dBi, Connectorized

Radio

Number of SUs / HBS	Up to 64 SUs simultaneously
Range	Up to 40 km / 25 miles
Frequency Bands	Multiband radio supporting 4.9 - 5.9 GHz or 3.3-3.8 / 3.65 GHz
Channel Bandwidth	5.x GHz- Configurable: 10, 20, 40, 80 MHz, Dynamic Channel BW selection: 20/40/80 MHz, 3.x GHz: 5, 7, 10, 14, 20, 40MHz
Radio Access scheme	OFDM, Auto MIMO 2x2 or Diversity per SU
Adaptive Modulation & Coding	BPSK/QPSK/QAM16/QAM64/QAM256 ¹
SLA management	CIR, MIR, Best-Effort
End to End Latency	Typical: 3.5msec
Duplex Technology	TDD, Configurable Uplink / Downlink ratio
Max Tx Power	HBS : 25dBm @ 5.x GHz, 23dBm@ 3.x GHz (in all modulation schemes) HSU: 25dBm, SU: 24 dBm
DFS (FCC & ETSI)	Supported
Spectrum Viewer	Supported at HBS & SU/ HSU
TDD Synchronization	Inter & Intra site synchronization, Embedded GPS receiver and antenna
Encryption	AES 128

Interfaces

Ethernet Interface	HBS: Two ports for Data & management, 10/100/1000BaseT, SU: 10/100BaseT
--------------------	-------------------------------------------------------------------------

Networking

Sub convergence layer	Layer 2
QoS	Packet classification to 4 queues according to 802.1p and Diffserv, Strict Priority, TTL
VLAN	802.1Q, QinQ, 4094 VLANs

Management

Management Application	HBS: RADWIN Manager & Web based management, SU: Smartphone App.
Protocol	SNMPv1, SNMPv3, Telnet, HTTP, IPv4 & IPv6, RADIUS for AAA Server
NMS Application	RADWIN NMS (RNMS) or integration with 3rd party NMS system via standard MIBs

Power

Power Feeding	Provided over PoE interface
Power Consumption	HBS < 25W, SU & HSU < 12 W

Environmental

Operating Temperatures	-35°C to 60°C / -31°F to 140°F
Humidity	100% condensing, HBS & HSU: IP67, SU: IP66

Radio Regulations

	FCC, IC, ETSI, WPC
--	--------------------

Safety

	FCC/IC (cTUVus), ETSI
--	-----------------------

EMC

	FCC, ETSI, CAN/CSA, AS/NZS
--	----------------------------

¹ QAM 256 only in 5.x band

RADWIN

RADWIN Ltd Corporate Headquarters

+972.3.766.2900 | sales@radwin.com

